
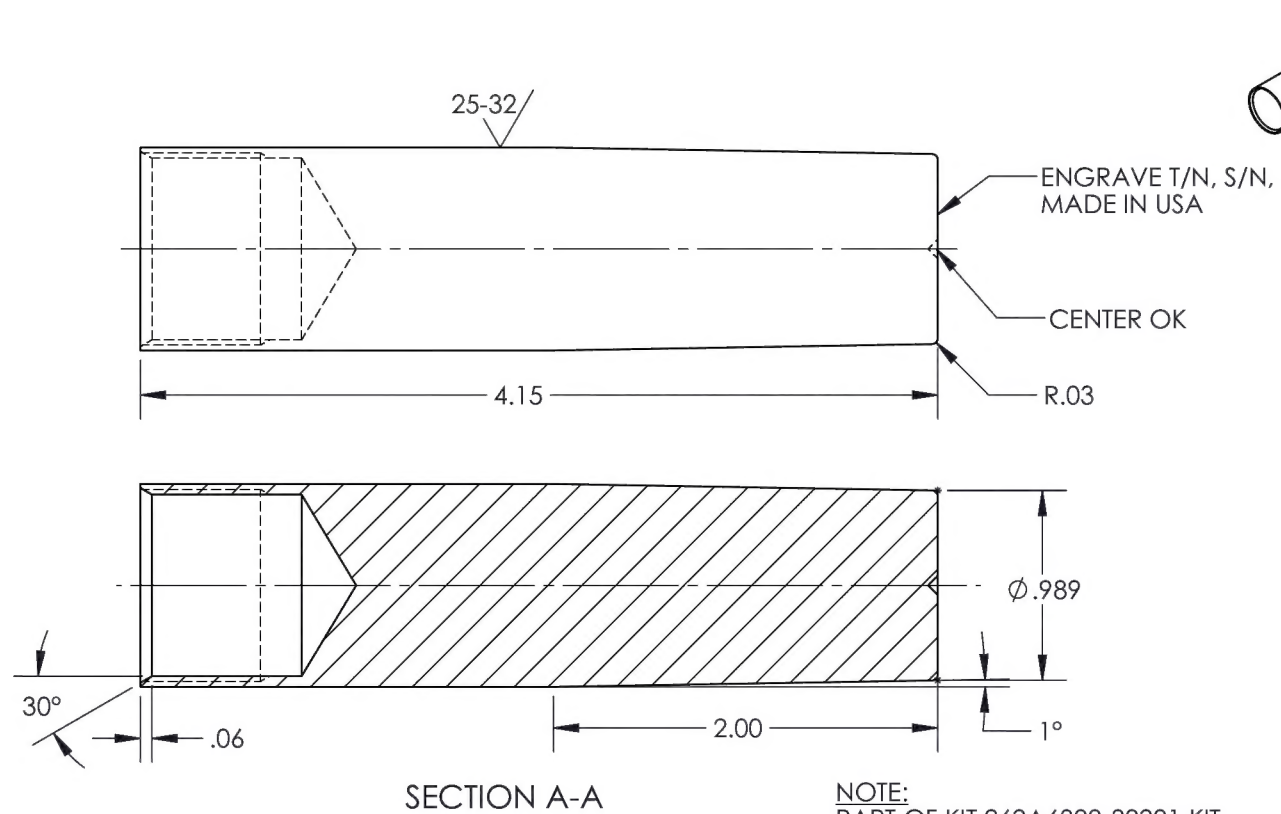


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		CH'D THREAD FROM 1-12 PER SCHWEIZER DWG.	8/16/2006	WP	DW
2		CH'D TO NEW FORMAT AND ADDED ENGRAVERING NOTE.	3/3/2009	WP	RW
2A		CH'D DIMENSIONS FROM 4.150 TO 4.15 & 2.000 TO 2.00.	11/5/2013	JAG	GE
3	15-0316	CH'D THREAD CALL OUT WAS D&T Ø1-20 IS 1-20 UNEF -2B $\nabla$ .63 MIN, CH'D ENGRAVE NOTE WAS ENGRAVE TOOL No. IS ENGRAVE T/N, S/N, MADE IN USA.	9/30/2015	RJC	JAG

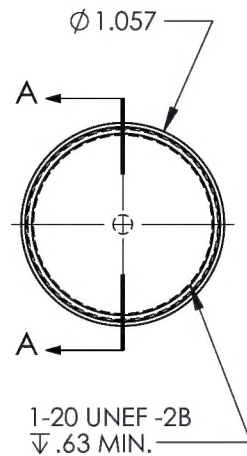

NOTE:  
PART OF KIT 269A6300-80901 KIT.

<b>DART AEROSPACE</b>	
TITLE <b>PISTON GUIDE</b>	
DWG NO. <b>269A3162-3-MT-1-1-20</b>	REV <b>3</b>
MAT'L STRESS PROOF	DRAWN BY: <b>PERRITT</b>
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVED <i>D Weil</i>
.XXX $\pm$ .005	HEAT TREAT
.XX $\pm$ .01	FINISH
.X $\pm$ .1	BLACK OXIDE
ANGLES $\pm$ 5°	SPEC
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	USED ON MODEL
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	<b>269</b>
SCALE <b>1:1</b>	DATE <b>8/14/2006</b>
SHEET 1 OF 1	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
				1		STRESS PROOF		